

# BAC12 SERIES

## BAC12-150 12V AGM Battery



**BOSCH**  
Invented for life

### Applications

Electric tools  
Vehicle in place of walking  
Lawn mowers

Golf trolleys and golf carts  
Portable apparatus, lights  
and instruments

Electric toys  
Illumination light  
Fire alarms

Portable power  
Wheelchairs  
Medical equipment

### Bosch Master Data

Short Order Part Number <b>BAC12-150</b>	Bosch 13 Digit Part Number <b>0092L57157HD3</b>	Nominal Voltage <b>12V</b>	Nominal Capacity (20HR) <b>150.0 AH</b>
Cold Cranking Amperes (CCA) <b>1080.0 AH</b>			
<b>Case Size Dimension</b>			
Length <b>485±3mm (19.09 inches)</b>	Width <b>170±2mm (6.69 inches)</b>	Container Height <b>240±3mm (9.45 inches)</b>	Total Height (with Terminal) <b>240±3mm (9.45 inches)</b>
Approx Weight <b>43.5 kg (95.9lbs)</b>	Terminal <b>T11</b>	Container Material <b>ABS</b>	
<b>Rated Capacity</b>			
<b>160.8 AH/8.04 A (20hr, 1.80V/cell, 25°C/77°F)</b>	<b>150.0 AH/15.0 A (10hr, 1.80V/cell, 25°C/77°F)</b>	<b>131.6 AH/26.3 A (5hr, 1.75V/cell, 25°C/77°F)</b>	
<b>119.3 AH/39.8 A (3hr, 1.75V/cell, 25°C/77°F)</b>	<b>96.9 AH/96.9 A (1hr, 1.60V/cell, 25°C/77°F)</b>		
Max. Discharge Current <b>1500A (5s)</b>	Internal Resistance <b>Approx 2.5mΩ</b>		
<b>Operating Temp. Range</b>			
Discharge : -15-50°C (5-122°F)	Charge: 0-40°C (32-104°F)	Storage : -15-40°C (5-104°F)	
Nominal Operating Temp. Range <b>25±3°C (77±5°F)</b>	Cycle Use <b>Initial Charging Current less than 45.0A. Voltage 14.4V-15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C</b>		
Standby Use <b>No limit on Initial Charging Current Voltage 13.5V-13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C</b>			
Capacity affected by Temperature <b>40°C (104°F) 103%      25°C (77°F) 100%      0°C (32°F) 86%</b>			Self Discharge <b>Bosch BAC series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.</b>

### Certification Standards

AS/NZS  
4029.2:2000



### Constant Current Discharge (Amperes) at 25°C (77°F)


F.V/Time	10min	15min	20min	30min	45min	1hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	20hr
1.85V/cell	219.6	184.8	161.5	116.2	92.3	74.9	46.5	36.3	29.4	23.9	20.8	17.0	14.2	7.97
1.80V/cell	280.6	223.3	190.9	137.1	107.3	83.9	50.8	39.0	31.4	25.6	22.3	18.0	15.0	8.04
1.75V/cell	308.3	243.9	205.3	142.3	111.4	87.8	52.7	39.8	32.1	26.3	23.0	18.3	15.2	8.12
1.70V/cell	336.1	260.4	215.8	148.2	115.8	90.5	54.8	40.9	32.9	27.0	23.4	18.6	15.3	8.27
1.65V/cell	362.7	276.9	229.2	156.3	118.7	93.6	56.3	42.6	34.1	27.7	23.9	18.9	15.6	8.37
1.60V/cell	393.8	296.1	244.2	165.0	123.8	96.9	58.2	43.9	35.1	28.6	24.5	19.1	15.8	8.42

### Constant Power Discharge (Watts) at 25°C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1hr	2hr	3hr	4hr	5hr	6hr	8hr	10hr	20hr
1.85V/cell	409.8	348.4	307.7	223.3	178.5	145.4	90.7	70.9	57.5	46.9	41.1	33.6	28.0	15.9
1.80V/cell	516.6	414.7	358.2	260.3	205.9	161.9	98.3	75.9	61.1	50.2	44.0	35.6	29.7	16.1
1.75V/cell	560.6	448.6	382.2	268.9	212.7	168.7	101.7	77.1	62.4	51.4	45.1	36.2	30.0	16.2
1.70V/cell	602.5	475.4	399.4	278.8	220.6	173.6	105.5	79.0	63.9	52.6	46.0	36.7	30.2	16.5
1.65V/cell	645.6	502.2	422.3	292.8	225.2	178.8	108.1	82.2	65.9	54.0	46.9	37.2	30.8	16.7
1.60V/cell	689.0	530.7	445.2	306.0	232.6	183.7	111.1	84.3	67.7	55.5	47.8	37.5	31.1	16.8


# Product Dimension & Design

**T11 Terminal**  
Unit: mm [inches]

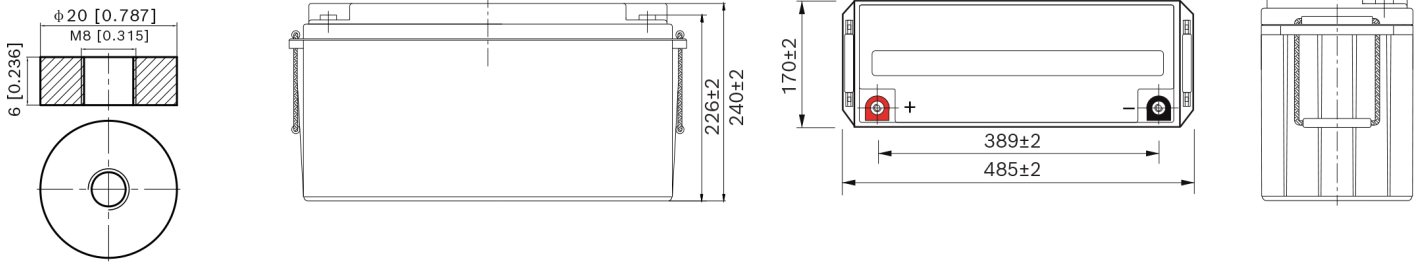


# Product Performance Overview


## Discharge Characteristics

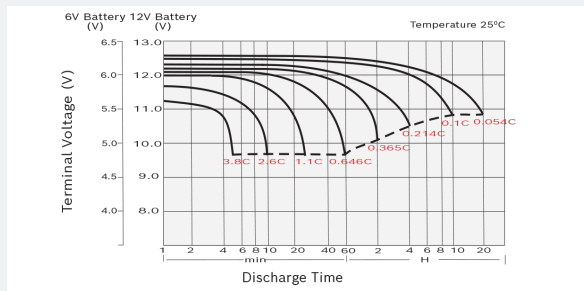


## Charging Characteristics

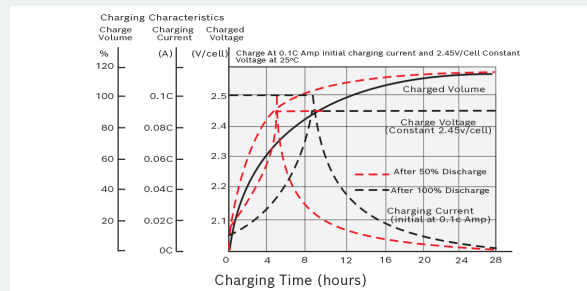


## Temperature Effects in Relation to Battery Capacity

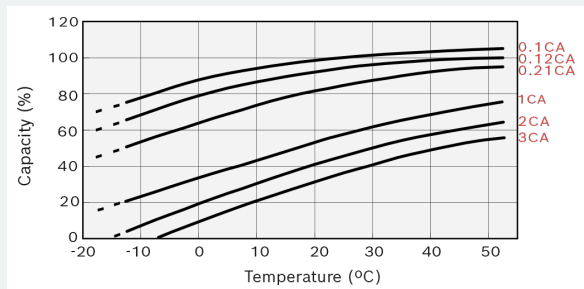

## Cycle Life in Relation to Depth of Discharge

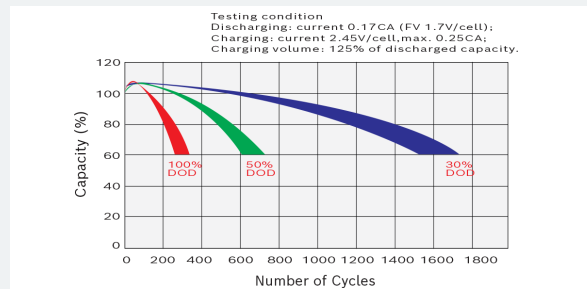

## Self Discharge Characteristics

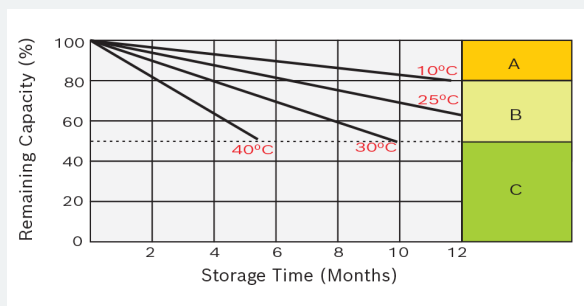

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
  1. Charged for above 3 days at limited current 0.25CA and constant volatge 2.25V/cell.
  2. Charged for above 20 hours at limited current 0.25CA and constant volatge 2.45V/cell.
  3. Charged for 8~10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

Your address for genuine Bosch quality:

Dealer stamp here: